

475

HYDROSORB®

For Water Detection & Particulate Removal



Cim-Tek® Filtration

PETROLEUM

MODEL: 475XLHS

Application

- Water detection and particulate removal
- Compatible with gasoline, diesel, ethanol, and methanol blends up to 10%
- Commonly used with Gilbarco® Service Station dispensers

Design Features

- 25 gpm (94.6 lpm) maximum flow
- 50 psi (3.4 bar) maximum working pressure
- 10 micron and 30 micron available
- Designed to detect free water, emulsified water, and remove particulates
- Pre-Lubed Gaskets standard




475XLHS w/50032 Adaptor


Benefits

- Monitors storage tank water condition
- Provides added protection to gasoline dispenser meter chambers
- Recognized by the Underwriter's Laboratory (UL®) for use with service station pumps and dispensers
- Decreased filter change-outs
- Ease of installation Pre-Lubed Gaskets


475 Hydrosorb® Series Dimensional Information

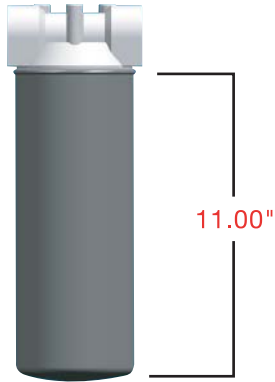

475XLHS w/50032 Adaptor

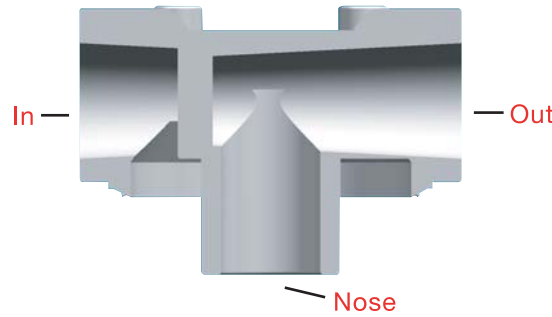

Section View 50032 Adaptor

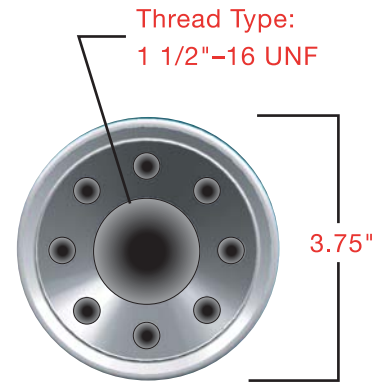

Top View w/Plate

Ordering Information

Part No.	Model No.	Description
70098	475XLHS-10	Spin-On Filter for Water Detection and Particulate Removal. 10 Micron Hydrosorb® Media with Extra Length Housing. (1 1/2"-16 UNF Thread)
70043	475XLHS-30	Spin-On Filter for Water Detection and Particulate Removal. 30 Micron Hydrosorb® Media with Extra Length Housing. (1 1/2"-16 UNF Thread)

Adaptor

Part No.	Material	Description	Fuel Ports	Nose	Use With
50032	Aluminum	Single Adaptor	1" NPT	1 1/2"-16 UNF	All Above

NOTE: See adaptor page for additional details.

Replacement Gasket

Part No.	Description
90036	Buna-N Pre-Lubed Gasket Used On All Above

NOTE: Filters are not to be used with aviation applications.