

# FLEET FUELING SYSTEMS



**SPECS**



MODEL	CABINET MODEL FOR 115-VOLT	CABINET MODEL FOR 230-VOLT
PART NUMBER	133604-51 w/ <b>M-3120</b> Pump. Meter is calibrated in gallons. 133604-52 w/ <b>M-3120</b> Pump. Meter is calibrated in litres.	133604-54 w/ <b>M-3220</b> Pump. Meter is calibrated in gallons. 133604-55 w/ <b>M-3220</b> Pump. Meter is calibrated in litres. 133604-53 w/ <b>M-3260</b> Pump. Meter is calibrated in litres.
VOLTAGE & TYPE	115-volt AC - Vane	230-volt AC - Vane
FLOWRATE	Up to 20 GPM (76 LPM)	M-3220 delivers up to 20 GPM (76 LPM) @ 60 Hz or up to 17 GPM (64 LPM) @ 50 Hz M-3260 delivers up to 64 LPM @ 50 Hz.
DUTY CYCLE	30 min. On / 30 min. Off	30 min. On / 30 min. Off
NOZZLE	Sold separately.	Sold separately.
INLET/OUTLET SIZE	1 in. / 3/4 in.	1 in. / 3/4 in.
SUCTION PIPE	None	None
HOSE	M-3120 accepts NPT connection. Hose sold separately.	M-3220 accepts NPT connection. M-3260 accepts BSPT connection. Hose sold separately.
PRODUCT INCLUDES	M-3120 Pump, MR 5-30 Meter & Tank Adapter	Pump, MR 5-30 Meter & Tank Adapter
UNIQUE FEATURE	Pump and meter are combined in a self-contained cabinet.	Designed for 230-volt applications.
USE WITH	Gasoline, Gasoline/Ethanol blends at levels designated as "gasohol" (E10 maximum), diesel and kerosene.	
APPROVALS	U.L. Listed to U.S. and Canadian Standards	CM-3220: U.L. Listed to U.S. and Canadian Standards CM-3260: Motor U.L. Listed to U.S. and Canadian Standards, CE
WARRANTY	2 Year	2 Year

# GPI BUILDS PRODUCTS IN THE HEARTLAND OF THE U.S.A.



## SPECS



Factory assembled GPI Combos are available with the **M-3120** or **M-3130 Pump** and includes the **MR 5-30 Meter**. Meter is calibrated in gallons or litres.  
(Note: 12 feet of hose and choice of manual or automatic nozzle included on select models as well as a 12 ft. hose.)

### MODEL

### 115 & 230-VOLT PUMP & METER COMBOS (ASSEMBLED)

### PART NUMBER

#### M-3120 PUMPS

#### M-3130 PUMPS

CALIBRATED IN GALLONS

133600-58 **M-3120-ML/MR 5-30-G6N**  
With manual nozzle - 3/4 in. NPT outlet.  
133600-59 **M-3120-AL/MR 5-30-G6N**  
With auto nozzle - 3/4 in. NPT outlet.  
133600-60 **M-3120-PO/MR 5-30-G8N**  
Hose and nozzle sold separately -  
1 in. NPT outlet.

133601-57 **M-3130- ML/MR 5-30-G8N**  
With manual nozzle - 1 in. NPT outlet.  
133601-58 **M-3130-AD/MR 5-30-G8N**  
With auto nozzle - 1 in. NPT outlet.  
133601-59 **M-3130-PO/MR 5-30-G8N**  
Hose and nozzle sold separately - 1 in. NPT

CALIBRATED IN LITRES

133600-61 **M-3120-ML/MR 5-30-L6N**  
With manual nozzle - 3/4 in. NPT outlet.  
133600-62 **M-3120-AL/MR 5-30-L6N**  
With auto nozzle - 3/4 in. NPT outlet.  
133600-57 **M-3120-PO/MR 5-30-L8N**  
Hose and nozzle sold separately -  
1 in. NPT outlet.

133601-60 **M-3130-ML/MR 5-30-L8N**  
With manual nozzle - 1 in. NPT outlet.  
133601-61 **M-3130-AD/MR 5-30-L8N**  
With auto nozzle - 1 in. NPT outlet.  
133601-56 **M-3130-PO/MR 5-30-L8N**  
Hose and nozzle sold separately -  
1 in. NPT outlet.

### FLOWRATE

Up to 20 GPM (76 LPM)

Up to 30 GPM (113 LPM)

### VOLTAGE & TYPE

115-volt AC - Vane

115/230 -volt AC - Vane

### DUTY CYCLE

30 min. On / 30 min. Off

### NOZZLE

Choose automatic or manual shutoff nozzle.

### PRODUCT INCLUDES

Either M-3120 or M-3130 Pump, MR 5-30 Meter, 12 ft. of Hose, Tank Adapter and choice of nozzle. Hose and Nozzle included on select models. (Power Cord and Suction Pipe not included.)

### USE WITH

Gasoline, Gasoline/Ethanol blends at levels designated as "gasohol" (E10 maximum), diesel and kerosene.

### APPROVALS

Pump, motor and meter are U.L. Listed to U.S. and Canadian Standards.

Pump and meter are U.L. Listed to U.S. and Canadian Standards. U.L. Listed and CSA Certified motor.

### WARRANTY


2 Year

# FLEET FUELING SYSTEMS



Same great product, now with our MR 5-30 Meter

**SPECS**

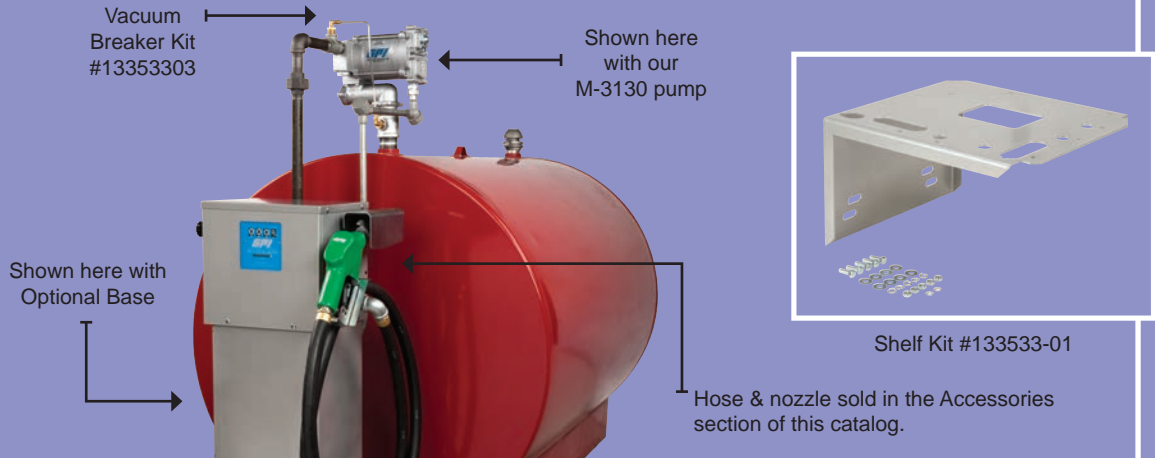

<b>MODEL</b>	<b>MR 5-30 REMOTE DISPENSER</b>	
	Pump sold separately.	Accessories sold separately.
	Order 133200-10 for 20 GPM Pump; Order 13353302 for Vacuum Breaker Kit  Order 133220-05 for 30 GPM Pump; Order 13353303 for Vacuum Breaker Kit	Order 133511-01 for Optional Cabinet Base (shown above)  Order 133533-01 for Shelf Kit (shown above; will fit on either front or side of tank)
<b>PART NUMBER</b>	133300-55 Remote Dispenser - calibrated in gallons 133300-56 Remote Dispenser - calibrated in litres	
<b>VOLTAGE &amp; TYPE</b>	115/230-volt - Dispenser Unit	
<b>FLOWRATE of GPI pumps (SOLD SEPARATELY)</b>	M-3120 - 20 GPM (76 LPM) or M-3130 - 30 GPM (114 LPM)	
<b>DUTY CYCLE</b>	N/A	
<b>POWER CORD</b>	None	
<b>HOSE &amp; NOZZLE</b>	Hose and nozzle sold separately (Sold in the Accessories section of this catalog)	
<b>INLET/OUTLET SIZE</b>	1 in. NPT	
<b>SUCTION PIPE</b>	None	
<b>PRODUCT INCLUDES</b>	Dispenser, nozzle holder, solenoid and MR 5-30 Meter. Hose and nozzle sold separately.	
<b>UNIQUE FEATURE</b>	Durable dispenser mounts on a fuel tank for easy refueling. Cabinet is powder-coated; nozzle cradle and nozzle cover are zinc plated for extra corrosion resistance. GPI's MR 5-30 Remote Dispenser can also be used with #126517-01 Pulser Kit (optional).	
<b>USE WITH</b>	Gasoline, Gasoline/Ethanol blends at levels designated as "gasohol" (E10 maximum), diesel and kerosene.	
<b>APPROVALS</b>	U.L. Listed to U.S. and Canadian Safety Standards.	
<b>WARRANTY</b>	2 Year	